

## Data Sheet

# Solid Line



### **Elegant industrial parquet pattern with completely straight lines for fast installations**

Solid Line is available in oak and ash in several dimensions and can be used in all types of rooms / buildings. The many small strips almost give the impression of a big roaring sea

Solid Line is made of solid wood and must be glued to the subfloor. Solid Line can be delivered with surface treated with oil or lacquer that shortens and simplifies assembly, and increases resistance to dirt, pressure marks and wear.

Solid Line meets all requirements when using under-floor heating.

Solid Line is perfect for projects which require fast and efficient installation as it has a number of time-saving benefits:

- Short time between start-up and assembly of finished flooring
- There is no risk that assembled spells subsequently "pops up" and require repair, grinding and oil
- No abrasive dust and thus considerable savings as well as improvement of environmental friendliness.

# Solid Line – Data Sheet

## Dimensions and build-up

Thickness: 10 / 15 mm.

Width: 163 / **245** mm.


Length: 490 mm.

Width of single strips: 10 / 15 / **22** mm

Solid Line is supplied on prefinished sheets of 10 x 163 / 245 x 490 mm, made up of small strips held together by a wood stability strips on the backside of the sheet.

## Wood species

Oak and ash.

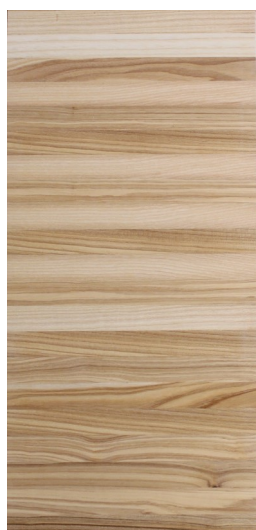

ASH OBJECT



OAK OBJECT

## Profile

Tongue and groove on all 4 sides. Sharp edges.

The boards are profiled after the surface treatment – resulting in a beautiful floor with hardly any visible joints

## Grade description

### Object

A very characteristic look with all natural colour variations and structures. Knots, fillers, sapwood and brown heart is found.

Grading vary by wood species and dimension. Wood is a natural material, variation in terms of descriptions and photos will always occur. Possibly. Samples show only dimension and construction and can not display the sorting. Variations will certainly occur between small samples and actual deliveries of larger areas.

## Surface treatment:

Solid Line can be delivered a oiled, lacquered or unfinished.

The oil into the wood and protects the floor effectively from dirt and wear. The oil gives a silk mat look and emphasizes

the unique character of an original wooden floor.

Unlike painted surfaces, it is possible to perform repairs on a range of occasions. The surface is hypoallergenic, easy to clean, and easy to maintain.

Solid Line must be treated with care oil before using the floor.

## Installation

The sheets can be fully glued to the subfloor with HØRNING MX Flex glue. Solid Line can be delivered prefinished which saves time in the installation.

**Always study the installation guidelines from HØRNING before installation.**

## Renovating

Ideal for renovating due to the small thickness of 10 mm.

## Indoor climate

It is very important that the surface temperature never exceeds 27 degrees!

The relative humidity (RF) must be between 35 and 65% at approx. 20°C - both before, during and after assembly.

## Environment

FSC® goods are delivered on request.

HØRNING cares about the environment and sustainable forestry. We are of course FSC certified.



The mark of  
responsible forestry

## CE

HØRNING floors are generally CE certified in accordance with the EU Declaration on Wooden Floors for Indoor Use; EN 14342.